




Customized ESS Lithium Battery Intelligent Monitoring With BMS 2.56kwh 5.12kwh

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: XWELL
- Certification: UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1 safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE
- Model Number: XW-2560W-1
- Minimum Order Quantity: 1 pcs
- Packaging Details: Carton
- Delivery Time: 7-10 working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 pcs per month

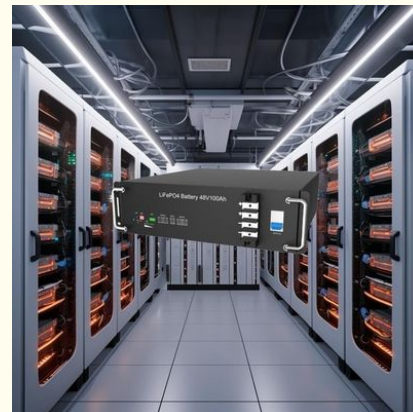

Product Specification

- Battery Voltage: 51.2V
- Battery Capacity: 5.12kwh
- Battery Discharge Current: 50A
- Cell: LiFePO4 Prismatic
- Standard Charge Voltage: 54.6V
- Max Charge Current: 50A
- Discharge Cut-off Voltage: 42.5V
- Display: LCD Optional
- Communication Interface: RS485, RS232, CAN
- Cycle Life: >6000 Cycles(80%DOD)
- Highlight: **BMS ESS Lithium Battery, 2.56kwh ESS Lithium Battery**

for more products please visit us on esslithiumbattery.com

Product Description

Intelligent Monitoring With BMS Customization A-Grade 2.56kwh 5.12kwh 10.24kwh ESS Lithium Battery 20Ah 100Ah 200Ah

Advantages of ESS Lithium Battery

Morning: Optimized self-consumption will be achieved. Batteries are used to store the excess energy produced by PV system

Afternoon: Extra energy will be fed into the grid when batteries are fully charged and system has already met its self consumption requirement.

Evening: Batteries will power the AC load when the sun sets.

Night: If the battery capacity is insufficient to meet self consumption, electricity will be obtained from the grid

Application of ESS Lithium Battery

1. Off-grid Solar ESS
2. Marine /Yatch
3. Night Fishing Power
4. RV/ Camper Power
5. Camping Power Supply
6. Solar Street Light


Features of ESS Lithium Battery

Easy installation
Light weight
Compact size

Industrial And Commercial Energy Storage System Specification


Model	51.2V50Ah	51.2V100Ah	51.2V200Ah
Nominal voltage	51.2V		
Nominal capacity (kwh)	2.56	5.12	10.24
Cell type	LiFePO4		
Standard charge voltage	54.6V(adjustable)		
Max charge current	50A		
Discharge cut-off voltage	42.5V(adjustable)		
Max discharge current	50A		
Display	LCD(Optional)		
Communication interface	CAN/RS485/RS232		
Cycle life	>6000 Cycles (80%DOD)		
Charge temperature range	0~45°C		
Discharge temperature range	-20~60°C		
Color	Black		
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U
Weight	About 35Kg	About 42Kg	About 84Kg
Installation method	Rack Mount		

Cell Specification of ESS Lithium Battery




#	Item	Parameter
A	Height	119±1.0 mm
B	Width	160±1.0 mm
C	Thickness	≤50 mm
D	Tabs Distance	97±0.5 mm


Operation Pannel of ESS Lithium Battery

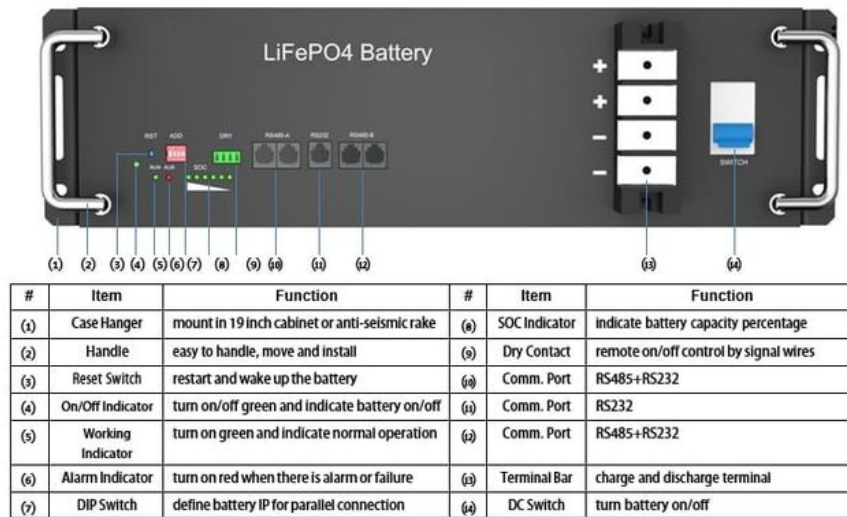

Size of ESS Lithium Battery

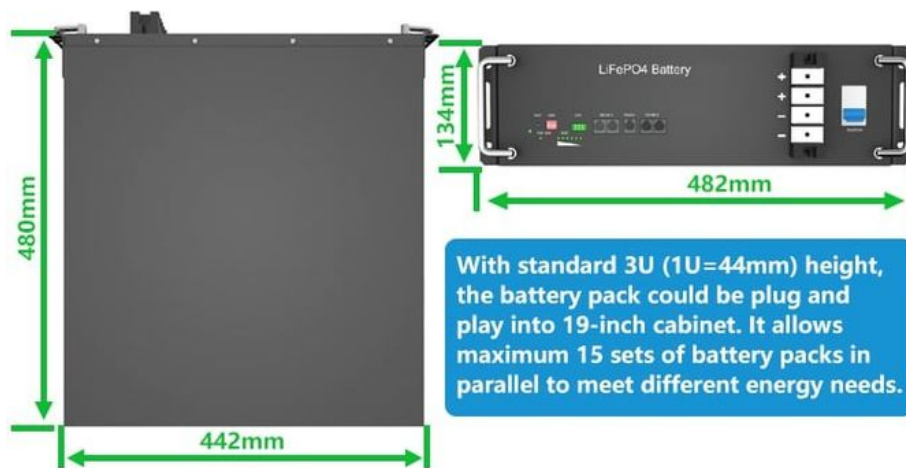

Structure of ESS Lithium Battery

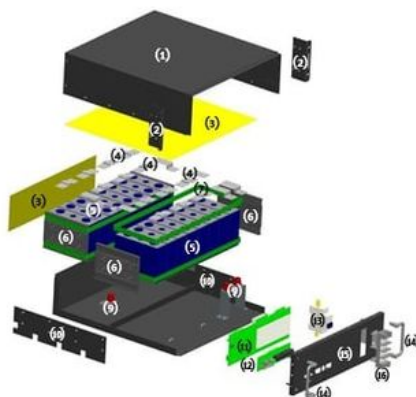

#	Item	Material
(1)	Case Cover	SPCC
(2)	Case Hanger	SPCC
(3)	Insulation Sheet	Ethoxyline
(4)	Bus-Bar	Aluminum Alloy
(5)	Battery Cell	LFP, Aluminum Shell
(6)	Module Side Plate	ABS / PC
(7)	Cell Binding Loop	Plastic Steel
(8)	Case Bottom	SPCC
(9)	Insulating Wiring Terminal	Bakelite
(10)	Side Plate Combination Board	SPCC
(11)	BMS	PCB
(12)	Commination Board	PCB
(13)	DC Switch	/
(14)	Handle	Sherardized SPCC
(15)	Case Front Cover	SPCC
(16)	Terminal Bar (+ & -)	/

Application of ESS Lithium Battery

Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

Our services

1. Your inquiry related to our products price will be replied in 24 hours.
2. Experienced staffs to answer all your enquiries in fluent English
3. We make the OEM and ODM service for more than 5 years
4. Protection of your sales area, ideas of design and all your private information.
5. No matter big order or small order, we will provide all the best quality, best service.
6. If our products have any problem that we caused, they will be sent free in the next order.



XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.

+86 18620492985

sales@esslithiumbattery.com

esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China