



## 10.24kwh 200Ah Lithium Batterie Lifepo4 Rackmount Lithium Battery Home Energy Storage System

Our Product Introduction

### Basic Information

- Place of Origin: China
- Brand Name: XWELL
- Certification: UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1 safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE
- Model Number: XW-1024W-1
- Minimum Order Quantity: 1 pcs
- Price: USD
- Packaging Details: Carton
- Delivery Time: 7-10 working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 pcs per month



### Product Specification

- Max Continuous Charge Curre: 200A
- Nominal Capacity: 200A
- Voltage(V): 48V
- Cell Type: LiFePO4 Prismatic Cell
- Discharge Cut-off Voltage: 42.5V
- Communication Interface: RS485, RS232, CAN
- Nominal Capacity (kwh): 10.24kwh
- Highlight: **200Ah Rackmount Lithium Battery, 10.24kwh Rackmount Lithium Battery**

for more products please visit us on [esslithiumbattery.com](http://esslithiumbattery.com)

## Product Description

### 5.12kwh 100A Lithium Batterie Lifepo4 Rackmount Lithium Battery Home Energy Storage System

#### Rackmount Lithium Battery Energy Storage System

Rackmount lithium-ion battery systems are modular energy storage solutions designed for installation in 19-inch server racks. They provide scalable, high-density battery backup power for applications like data centers, telecom networks, and industrial facilities.


#### Benefits

Flexible, scalable capacity to match changing power needs  
 Compact, space-efficient footprint in server rack environments  
 Reliable backup power to protect critical infrastructure  
 Reduced operating costs and lower total cost of ownership  
 Compatibility with common data center/IT power infrastructure

#### Rackmount Lithium Battery Specification


Model	51.2V50Ah	51.2V100Ah	51.2V200Ah
Nominal voltage	51.2V		
Nominal capacity (kwh)	2.56	5.12	10.24
Cell type	LiFePO4		
Standard charge voltage	54.6V(adjustable)		
Max charge current	50A		
Discharge cut-off voltage	42.5V(adjustable)		
Max discharge current	50A		
Display	LCD(Optional)		
Communication interface	CAN/RS485/RS232		
Cycle life	>6000 Cycles (80%DOD)		
Charge temperature range	0~45°C		
Discharge temperature range	-20~60°C		
Color	Black		
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U
Weight	About 35Kg	About 42Kg	About 84Kg
Installation method	Rack Mount		

#### Cell Specification of Rackmount Lithium Battery

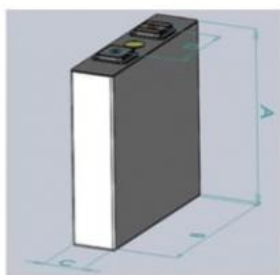


#	Item	Parameter
A	Height	119±1.0 mm
B	Width	160±1.0 mm
C	Thickness	≤50 mm
D	Tabs Distance	97±0.5 mm


#### Operation Pannel of Rackmount Lithium Battery

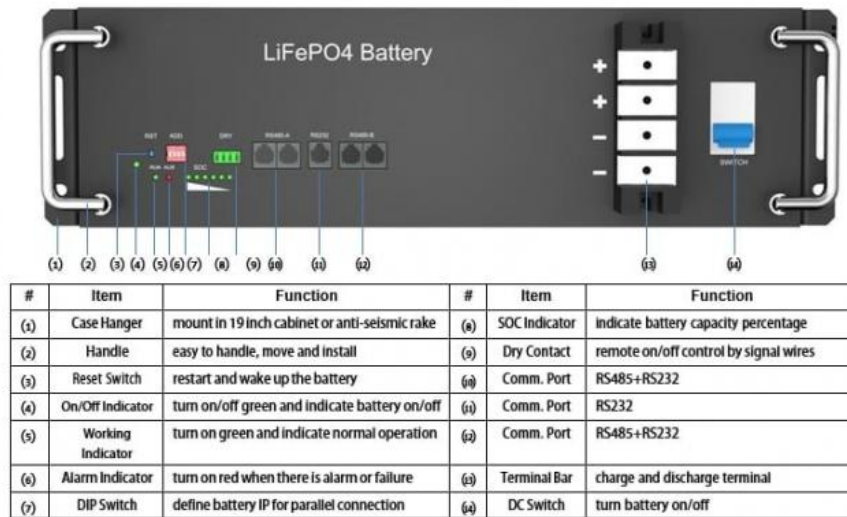

### Size of Rackmount Lithium Battery

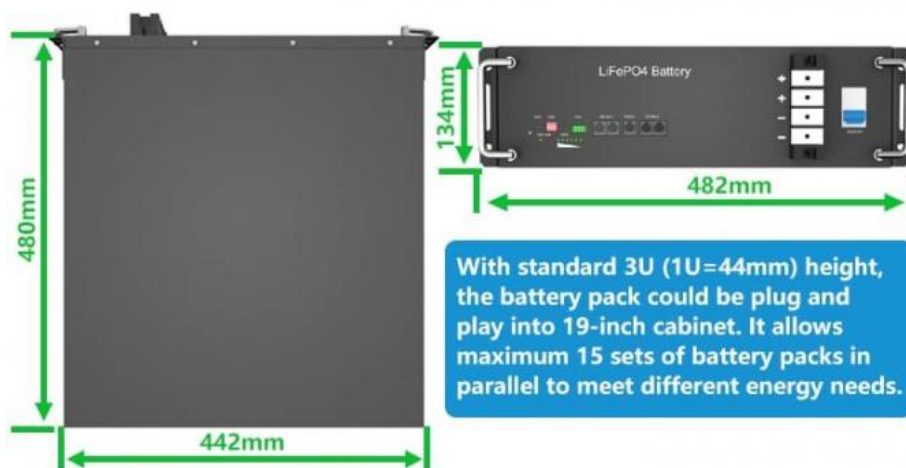

### Structure of Rackmount Lithium Battery

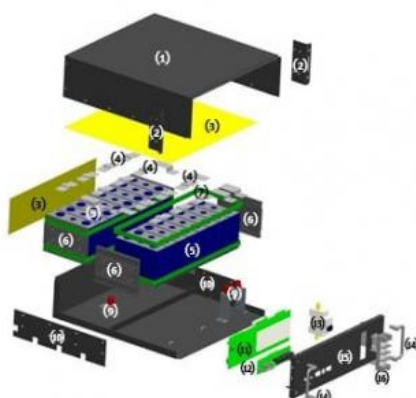

#	Item	Material
(1)	Case Cover	SPCC
(2)	Case Hanger	SPCC
(3)	Insulation Sheet	Ethoxyline
(4)	Bus-Bar	Aluminum Alloy
(5)	Battery Cell	LFP, Aluminum Shell
(6)	Module Side Plate	ABS / PC
(7)	Cell Binding Loop	Plastic Steel
(8)	Case Bottom	SPCC
(9)	Insulating Wiring Terminal	Bakelite
(10)	Side Plate Combination Board	SPCC
(11)	BMS	PCB
(12)	Commination Board	PCB
(13)	DC Switch	/
(14)	Handle	Sherardized SPCC
(15)	Case Front Cover	SPCC
(16)	Terminal Bar (+ & -)	/

### Application of Rackmount Lithium Battery

## Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

### Why choose us?

- Technical specifications and performance capabilities
- Safety record and certifications
- Warranty terms and after-sales support
- Integration with existing infrastructure
- Cost-effectiveness and total cost of ownership
- Company reputation, experience, and financial stability
- Scalability and flexibility to adapt to changing needs



**XWELL** GUANGDONG XWELL TECHNOLOGY CO., LTD.



+86 18620492985



[sales@esslithiumbattery.com](mailto:sales@esslithiumbattery.com)



[esslithiumbattery.com](http://esslithiumbattery.com)

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China